


# 800Vac/800A AC Combiner Solution for CPS Inverters



The CPS 800Vac/800A AC Combiner Box is designed for CPS 275kW three phase string inverters to optimize system design, installation, and wire management. The units combine the output of up to (3) CPS 275kW inverters allowing a cost-effective solution for simplifying system designs and minimizing AC wire losses. This solution enables savings on labor and material costs by reducing the amount of wires needed to connect CPS string inverters to the grid.

- Solutions Supplier** – CPS can supply inverter and BOS equipment for 1500V applications, which enables advantages for project logistics, shipment, and warranty management.
- Decreased Wiring Costs** – Combining CPS inverters with an AC Combiner Box reduces the amount of wires needed to connect the PV system to the grid.
- Optimized Design** – The AC Combiner Box is designed specifically for use with CPS 275kW inverters.

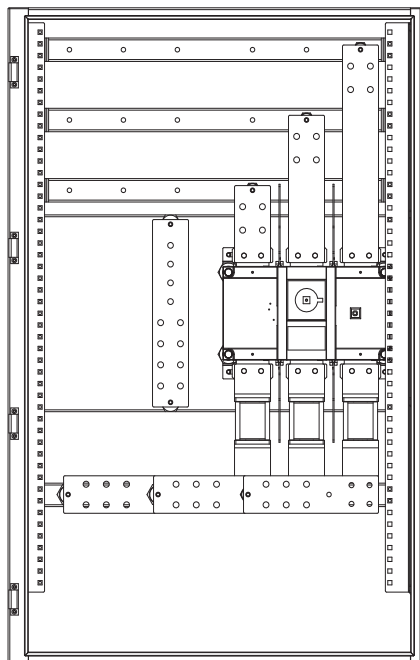

Internal View of AC Combiner Box



Model Name	CPS DPA03-800V/US
<b>Input Parameters</b>	
Number of Input Circuits	3
OCPD Type	Fuse
Disconnect	Yes
Compatible Inverter(s)	CPS SCH275KTL-DO/US-800
Rated Voltage	800Vac
Rated Input Current	3 x 200A
Input Conductor Size	3 x (1 x 300-500kcmil CU/AL)
Input Conduit Knockout Size	Removable Bottom Plate
<b>Output Parameters</b>	
Rated Output Current	600A
Output Conductor Size	4 x (2 x 600-750kcmil CU/AL)
Output Conduit Knockout Size	Removable Bottom Plate
Interrupting Capacity	65kA
Output Fuse Rating	1000A
<b>Mechanical</b>	
Dimensions (HxWxD)	55 x 36.2 x 14.75in (1400 x 920 x 375mm)
Weight	264lbs/ 120Kg
Padlockable Enclosure (LOTO)	Yes
Grounding Busbar	Yes
Breather Vent	Yes
<b>Environment</b>	
Enclosure Protection Degree	NEMA Type 3R
Operating Temperature Range	-22°F to +140°F / - 30°C to +60°C (derating from +104°F / +40°C)
Operating Humidity	0 to 95%, non-condensing
Operating Altitude	8202ft / 2500m (no derating)
<b>Safety</b>	
Certifications and Standards	UL1741
<b>Warranty</b>	
Standard	5 years

