


100/125 kW, 1500 Vdc String Inverters for North America

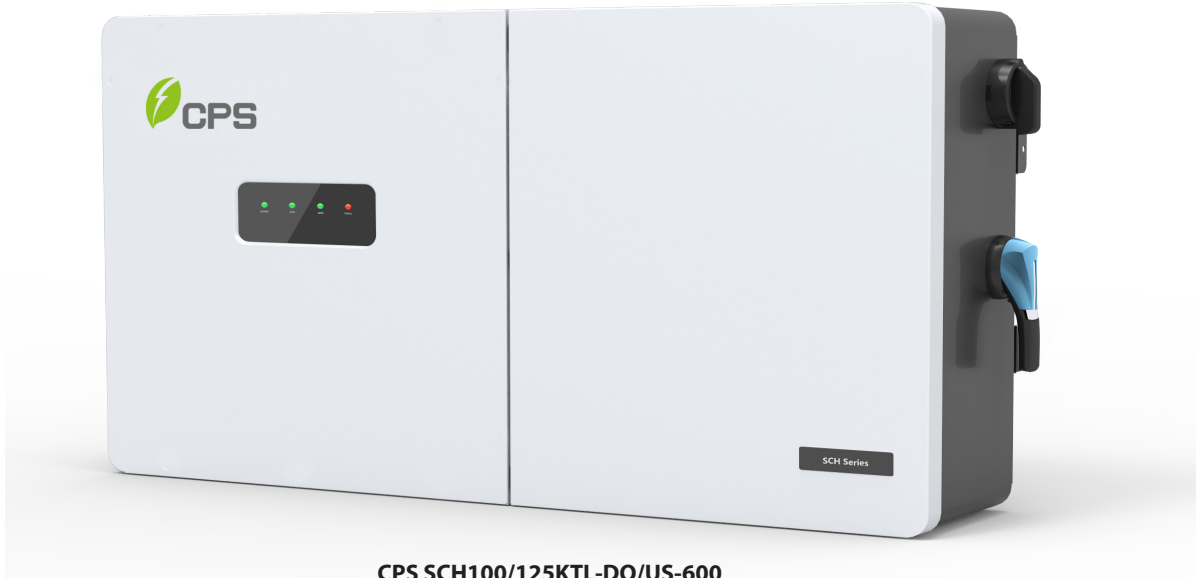

CPS SCH100/125KTL-DO/US-600


The 100 and 125 kW high power CPS three-phase string inverters are designed for ground mount applications. The units are high performance, advanced and reliable inverters designed specifically for the North American environment and grid. High efficiency at 99.1% peak and 98.5% CEC, wide operating voltages, broad temperature ranges and a NEMA Type 4X enclosure enable this inverter platform to operate at high performance across many applications. The CPS 100/125 kW products ship with the Standard or Centralized Wire-box, each fully integrated and separable with AC and DC disconnect switches. The Standard Wire-box includes touch-safe fusing for up to 20 strings. The CPS FlexOM Gateway enables communication, controls and remote product upgrades.

Key Features

- NFPA 70 and NEC compliant
- Touch-safe DC Fuse holders add convenience and safety
- CPS FlexOM Gateway enables remote firmware upgrades
- Integrated AC and DC disconnect switches
- 1 MPPT with 20 fused inputs for maximum flexibility
- Copper- and Aluminum-compatible AC connections
- NEMA Type 4X outdoor rated enclosure
- Advanced Smart-Grid features (CA Rule 21 certified)
- kVA headroom yields 100 kW @ 0.9 PF and 125 kW @ 0.95 PF
- Generous 1.87 (100 kW) and 1.5 (125 kW) DC/AC inverter load ratios
- Separable wire-box design for fast service
- Standard 5-year warranty with extensions to 20 years



100/125KTL Standard Wire-box

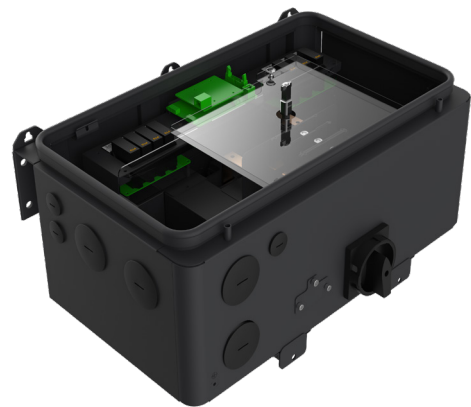

100/125KTL Centralized Wire-box



Model Name	CPS SCH100KTL-DO/US-600	CPS SCH125KTL-DO/US-600
DC Input		
Max. PV power	187.5 kW	
Max. DC input voltage	1500 V	
Operating DC input voltage range	860-1450 Vdc	
Start-up DC input voltage / power	900 V / 250 W	
Number of MPP trackers	1	
MPPT voltage range ¹	870-1300 Vdc	
Max. PV input current (Isc x 1.25)	275 A	
Number of DC inputs	Standard Wire-box: 20 PV source circuits, pos. and neg. fused Centralized Wire-box: 1 input circuit, 1-2 terminations per pole, non-fused	
DC disconnection type	Load-rated DC switch	
DC surge protection	Type II MOV (with indicator/remote signaling)	
AC Output		
Rated AC output power	100 kW	125 kW
Max. AC output power ²	100 kVA (111 kVA @ PF>0.9)	125 kVA (132 kVA @ PF>0.95)
Rated output voltage	600 Vac	
Output voltage range ³	528-660 Vac	
Grid connection type ⁴	3Φ / PE / N (neutral optional)	
Max. AC output current @ 600 Vac	96.2 / 106.8 A	120.3 / 127.0 A
Rated output frequency	60 Hz	
Output frequency range ³	57-63 Hz	
Power factor	>0.99 (±0.8 adjustable)	>0.99 (±0.8 adjustable)
Current THD	<3%	
Max. fault current contribution (1-cycle RMS)	41.47 A	
Max. OCPD rating	200 A	
AC disconnection type	Load-rated AC switch	
AC surge protection	Type II MOV (with indicator/remote signaling)	
System		
Topology	Transformerless	
Max. efficiency	99.1%	
CEC efficiency	98.5%	
Stand-by / night consumption	<4 W	
Environment		
Enclosure protection degree	NEMA Type 4X	
Cooling method	Variable speed cooling fans	
Operating temperature range	-22°F to +140°F / -30°C to +60°C (derating from +108°F / +42°C)	
Non-operating temperature range ⁵	-40°F to +158°F / -40°C to +70°C maximum	
Operating humidity	0-100%	
Operating altitude	8202 ft / 2500 m (no derating)	
Audible noise	<65 dBA @ 1 m and 25°C	
Display and Communication		
User interface and display	LED indicators, WiFi + APP	
Inverter monitoring	Modbus RS485	
Site-level monitoring	CPS FlexOM Gateway (1 per 32 inverters)	
Modbus data mapping	SunSpec / CPS	
Remote diagnostics / firmware upgrade functions	Standard / (with FlexOM Gateway)	
Mechanical		
Dimensions (W x H x D)	Standard Wire-box: 45.28 x 24.25 x 9.84 in (1150 x 616 x 250 mm) Centralized Wire-box: 39.37 x 24.25 x 9.84 in (1000 x 616 x 250 mm)	
Weight	Inverter: 121 lbs (55 kg) Standard Wire-box: 55 lbs (25 kg) Centralized Wire-box: 33 lbs (15 kg)	
Mounting / installation angle	15 - 90 degrees from horizontal (vertical or angled)	
AC termination	M10 stud type terminal [3Φ] (wire range: 1/0 AWG - 500 kcmil CU/AL; lugs not supplied) Screw clamp terminal block [N] (#12 - 1/0 AWG CU/AL)	
DC termination	Standard Wire-box: Screw clamp fuse holder (wire range: #12 - #6 AWG CU) Centralized Wire-box: Busbar, M10 bolts (wire range: #1AWG - 500kcmil CU/AL [1 termination per pole], #1 AWG - 300 kcmil CU/AL [2 terminations per pole]; lugs not supplied)	
Fused string inputs	20 A fuses provided (fuse values up to 30 A acceptable)	
Safety		
Certifications and standards	UL 1741-SA/SB Ed. 3, CSA-C22.2 NO.107.1-01, IEEE 1547-2018, FCC PART15	
Selectable grid standard	IEEE 1547a-2014, IEEE 1547-2018 ⁶ , CA Rule 21, ISO-NE	
Smart-grid features	Volt-RideThru, Freq-RideThru, Ramp-Rate, Specified-PF, Volt-VAR, Freq-Watt, Volt-Watt	
Warranty		
Standard ⁷	5 years	
Extended terms	10, 15 and 20 years	

1) See user manual for further information regarding MPPT voltage range when operating at non-unity PF.

2) "Max AC apparent power" rating valid within MPPT voltage range and temperature range of -30°C to +40°C (-22°F to +104°F) for 100 kW PF≥0.9, and 125 kW PF≥0.95.

3) The "output voltage range" and "output frequency range" may differ according to the specific grid standard.

4) Wye neutral-grounded; delta may not be corner-grounded.

5) See user manual for further requirements regarding non-operating conditions.

6) Firmware version 12.0 or later required.

7) 5-year warranty effective for units purchased after October 1, 2019.